

PBP

DESIGN FEATURES

The R-K PBP series pressure bypass valve is a 3-port valve designed to relieve excess fluid pressure in piping systems. When mounted in-line, the pressure by-pass valve will permit fluid to pass through the system. When the fluid pressure approaches the valve setting, the excess fluid is vented through the bottom port.

Adjustable screw and lock-nut makes it easy to accurately pre-set relief pressure.

Wide working pressure range (10 to 80 PSIG)

Top entry for easy in-line maintenance and can be factory pre-set upon request.

No metal contact with fluid.

Note: This valve is not designed to be used in piping systems with back-pressure on the downstream side.

PRESSURE BYPASS VALVE

SPECIFICATIONS

Upstream Pressure	Vacuum to 150 PSIG	Temperature Range	0 F to 140 F for PVC 0 F to 180 F for POLYPRO 0 F to 280 F for PVDF 0 F to 340 F for TEFLON
Relief Pressure	10 to 80 PSIG	Valve ports	1/4" to 1" Valve FNPT 1.5" to 2" Valve MPT All valves are fully ported
Pressure differential	Plus or Minus 5 PSIG from any pre-set pressure relief point.	Mounting method	(4) 1/4" -20 tapped holes for standard machined valve body (1/4" to 1.00")
Material	Valve Body PVC Type 1, Grade 1 Polypropylene PVDF Teflon		
Seal	EPDM VITON KALREZ		

ORDER INFORMATION

The chart below will specify R - K standard valves regarding valve size, valve material, and seal material. For special orders, please consult the factory for pricing and delivery information.

PBP - X X X - X		
VALVE SIZE	MATERIAL	SEALS
25 = 1/4"	1 = PVC	E = EPDM
50 = 1/2"	2 = POLYPRO	V = VITON
75 = 3/4"	3 = PVDF	K = KALREZ
100 = 1.0"	4 = TEFLON	O = OTHER (Please specify)
150 = 1.5"	5 = OTHER (Please specify)	
200 = 2.0"		

R-K INDUSTRIES




1120 E. LOCUST STREET

ONTARIO, CA 91761

(909) 947-5227 • FAX: (909) 947-3039 • <http://www.rkvalve.com>

ENGINEERING & PERFORMANCE DATA

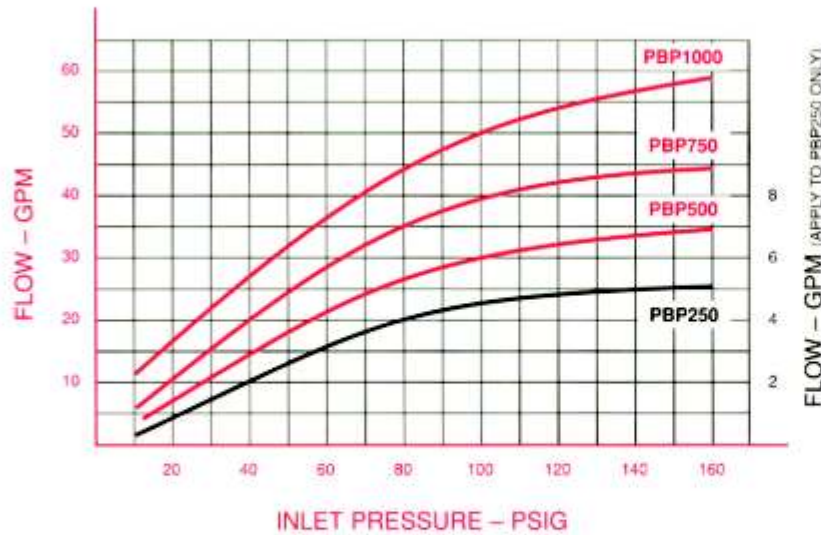


NOTES

PERFORMANCE CURVES SHOW THE FLOW RATE OF PBP VALVES WITH PISTON SEALS FULLY OPEN, AND 100% OF THE FLUID FLOW THRU THE VALVE. THESE CURVES WILL BE CHANGED DEPENDING UPON THE FLOW OF THE SYSTEM AND AT EACH DIFFERENT PRESSURE SETTING POINT.

TEST DATA WAS PERFORMED WITH 68 DEGREE F WATER, AND 160 PSIG MAXIMUM PRESSURE.

THESE PERFORMANCE CURVES WILL BE CHANGED WITH HIGHER VISCOSITY LIQUID AND/OR HIGHER TEMPERATURE.

CONSULT YOUR LOCAL SALES REP OR MANUFACTURER DIRECTLY FOR CUSTOM PRODUCTS OR SPECIAL APPLICATIONS.

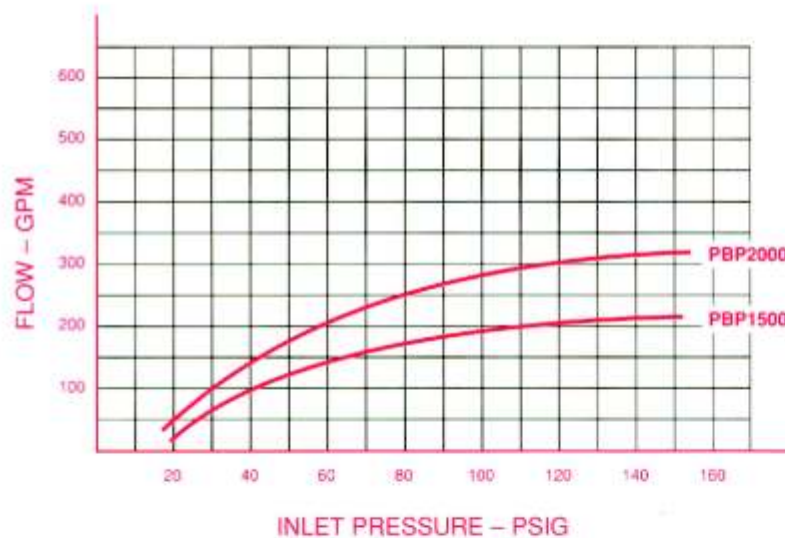


DIMENSIONAL DATA

DIMENSIONS IN INCHES

Valve size	Ports	A	B	C	Cv
1/4"	FNPT	2.00	2.70	.5	.58
1/2"	FNPT	3	3.4	.7	2.87
3/4"	FNPT	3.5	4.3	.9	3.31
1.0"	FNPT	4	4.7	1.1	4.32
1.5"	MPT	5.5	6.5	1.5	16.4*
2.0"	MPT	6.0	7.5	1.7	21.6*

(*) Cv value @ 150 GPM

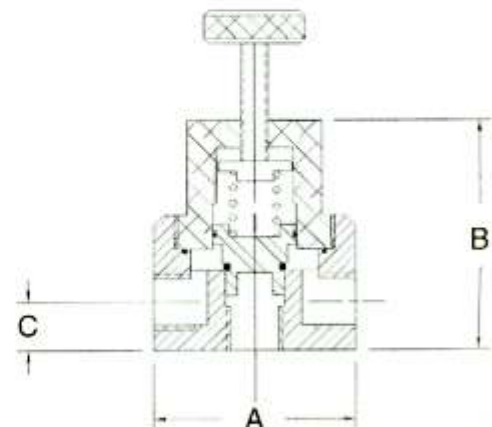

R-K INDUSTRIES



1120 E. LOCUST STREET
ONTARIO, CA 91761

(909) 947-5227 • FAX: (909) 947-3039 • <http://www.rkvalve.com>